

RICHTER single pots (S)


possible wiring for volume, blend, passive tone

- these pots come without wiring and output jack

RICHTER ELECTRONIC ENGINEERING

Dipl. Ing. Andreas Richter
Friedensstrasse 13 A
63533 Mainhausen

+49 (0)6182 27475
mail@richter-ee.de
www.richter-ee.de

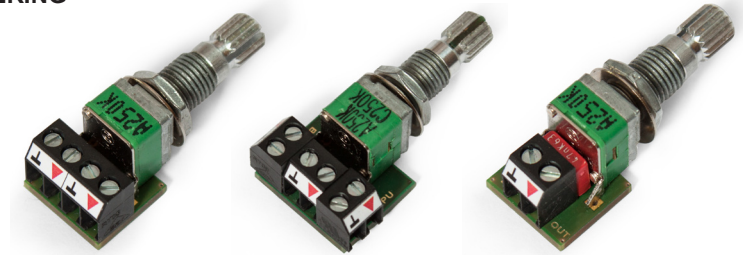

VAT: DE 215954674
WEEE-Reg.Nr.: DE 26620399

Features:

- Quick and easy mounting
- High quality dust proof pots
- Low tolerance film capacitor featuring lowest distortion and superior linearity
- Completely shielded, no shielding required inside the instrument

Technical Data:

volume

- pot value: 250 kA
- knurled shaft diameter: 6 mm
- bushing diameter: 8 mm
- bushing length: 10 mm
- screw terminals

passive tone

- pot value: 250 kA
- foil capacitor value: 47 nF
- knurled shaft diameter: 6 mm
- bushing diameter: 8 mm
- bushing length: 10 mm
- screw terminals

blend / balance

- knurled shaft diameter: 6 mm
- bushing diameter: 8 mm
- bushing length: 10 mm
- screw terminals

possible wiring:

