

## KOMO FLEX a (#M300) KOMO FLEX A (#M304) KOMO FLEX AF (#M306)

### Für Steh- u. Geharbeitsplätze im Feucht- und Trockenbereich

- Außergewöhnlich elastisch
- Enorm strapazierfähige Matte mit Noppenoberfläche
- Rutschhemmend durch wellig-gerilltes Unterseitenprofil
- Effektive Massage der Beine, regen die Durchblutung an

Die Flex ist für robuste Beanspruchung entwickelt, auch für Mehrschicht-Arbeitsplätze

#### Einsatzbereiche:

Montagestraßen, an Werkbänken und Maschinen, Sortier- und Verpackungsanlagen oder hinter Verkaufstheken (Ämter, Banken, Tresen), etc.




### For wet and dry areas

- Extremely flexible
- Enormously abrasion-resistant mats with bubble surface
- Slip-proof due to wavy line structure on bottom
- Effective massage of legs, stimulate blood circulation
- The flex is developed for robust exposure, also for multiple shift work

#### Application

Assembly lines, workbenches and machines, sorting plants and packaging lines, sales counters, cashier's counters, agencies, etc.

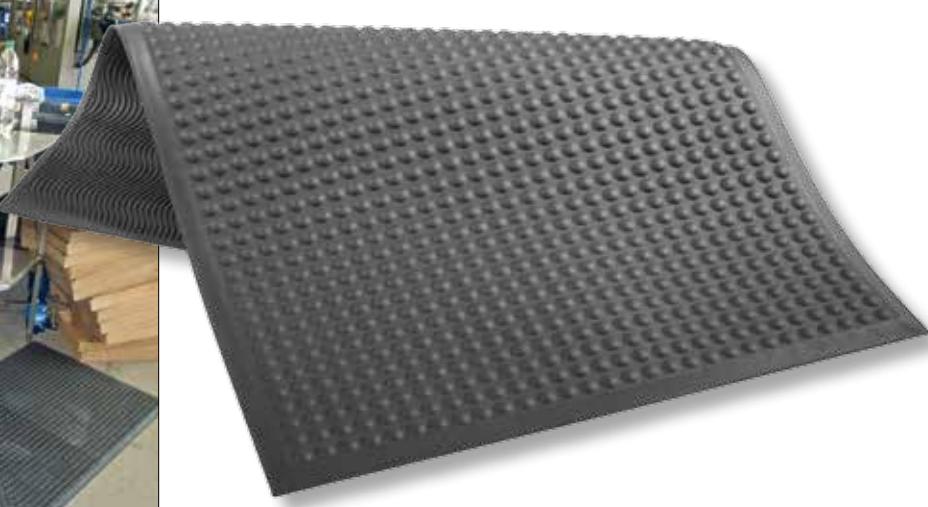

### Technische Daten:

|                                     |  |
|-------------------------------------|--|
| Material                            | Polyurethan, hochelastisch, mit <b>dicker</b> hochverdichteter Außenhaut   |
| Oberfläche                          | Noppen   |
| Unterseite                          | Rillenprofil   |
| Eigenschaften                       | hydrolysebeständig, rutschhemmend R10, trittsicher, Fuß-massierend, kälteisolierend, durchblutungsanregend, FCKW und H-FCKW-frei, stoßdämpfend, verschleißarm, bedingt säure- und ölbeständig, größtenteils chemikalien-, basen- und laugenbeständig |
| Farbe                               | anthrazit  |
| Maße                                | ca. 60 x 90 cm, zzgl. je 2 cm Anlaufsräume, Sondermaße lieferbar   |
| Höhe                                | ca. 15 mm  |
| Gewicht                             | ca. 2,6 kg   |
| Garantie                            | 5 Jahre auf Material und Verarbeitung bei sachgemäßem Gebrauch, Verschleiß ausgenommen   |
| Ausführungen<br>(DIN siehe Seite 7) | <b>FLEX a</b> $10^9 \Omega$ Standardausrüstung antistatisch/low charge<br><b>FLEX A</b> $10^7 \Omega$ ESD elektrisch ableitend<br><b>FLEX AF</b> $10^7 \Omega$ ESD elektrisch ableitend/feuerhemmend B1  |

### Technical specification

|                |  |
|----------------|--|
| Material       | Polyurethane, highly flexible with thick high-density outer skin   |
| Top-Surface    | bubbles  |
| Bottom-Surface | groove profile   |
| Features       | skid-resistant R10, slip-proof, foot-massaging, insulate against coldness, hydrolysis resistant, supporting blood circulation, shock-absorbing, CFC and H-CFC free, conditionally acid- and oil resistant, mostly chemical-, base- and leach resistant |
| Colour         | anthracite   |
| Dimensions     | ca. 60 x 90 cm plus 2 cm of bevelled edge each, other dimensions available   |
| Thickness      | ca. 15 mm  |
| Weight         | ca. 2.6 kg   |
| Warranty       | 5 years on material and workmanship when used correctly; fair wear and tear excluded.  |
| Models         | <b>FLEX a</b> $10^9 \Omega$ Standard antistatic/low charge<br><b>FLEX A</b> $10^7 \Omega$ ESD conductive<br><b>FLEX AF</b> $10^7 \Omega$ ESD conductive and fire-resistant B1  |