
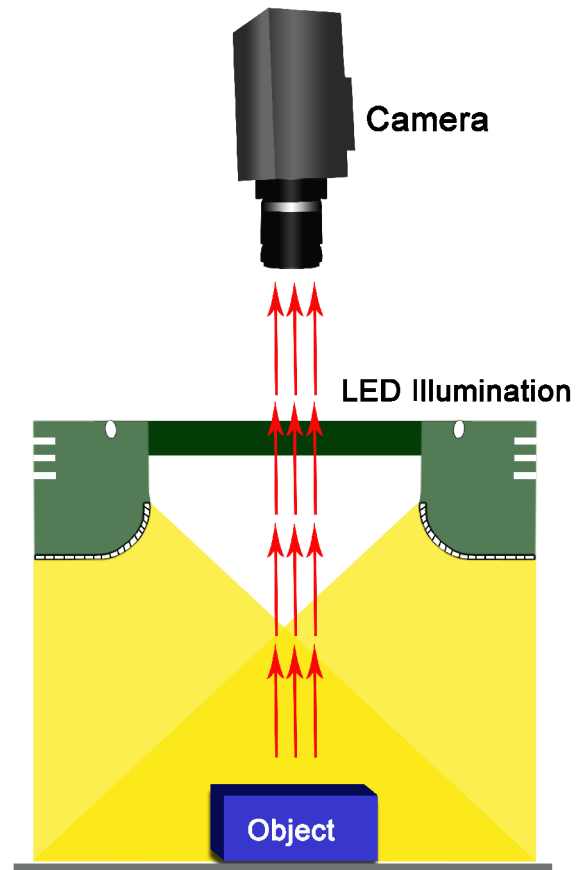


HPD Series – Uniform Ring Light Illumination

Diffused Power LED to achieve high uniform areas with higher flexibility.

Application: shining surfaces and food packaging

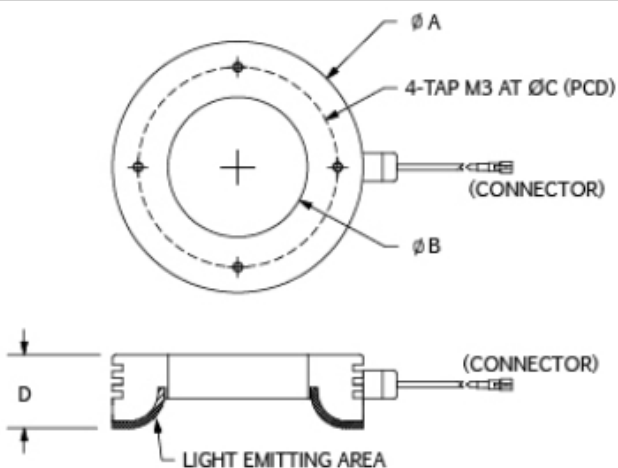

Model	Dimensions (mm)				Color	Voltage/ Watt	Current
	ØA	ØB	ØC	D			
HPD-00-070-1-X	75.5	42	60	22	●	24V / 1.80W	75mA
					● ● ○	24V / 2.16W	90mA
HPD-00-110-2-X	114	68	90	22	●	24V / 3.96W	165mA
					● ● ○	24V / 4.37W	182mA
HPD-00-170-1-X	176.6	111	150	29.6	●	24V / 18.0W	750mA
					● ● ○	24V / 18.9W	750mA
HPD-00-240-1-X	245	158.5	200	38	●	24V / 25.20W	1050mA
					● ● ○	24V / 26.88W	1120mA
RGB Model	Dimensions (mm)				Color	Voltage/ Watt	Current
	ØA	ØB	ØC	D			
HPD-00-240-3-RGB	245,0	158,5	200,0	38,0	● ● ●	24V / 21,84 W	910mA
						24V / 15,12 W	630mA
						24V / 16,8 W	700mA