



NIKON

SURVEY PRODUCT CATALOG

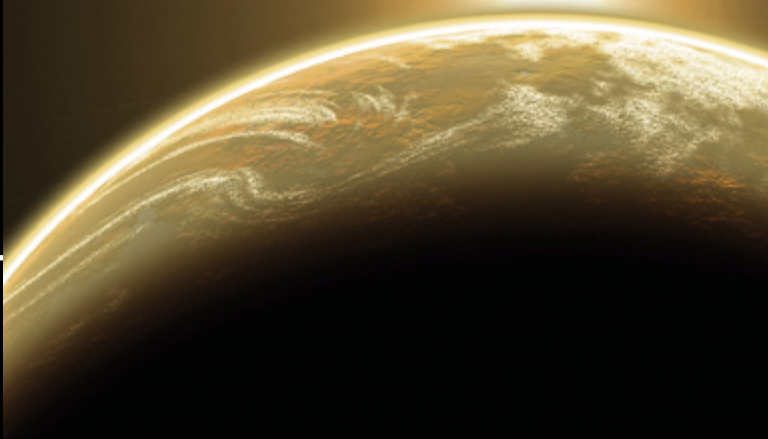

WWW.NIKONPOSITIONING.COM

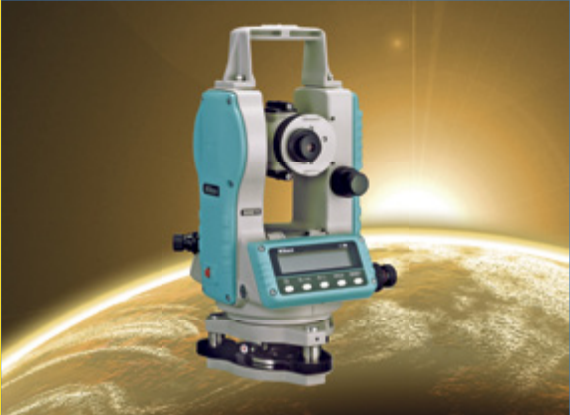

Contents

Nikon Products

Nikon Total Stations	1–10
Nikon Theodolites.	11–14
Nikon Auto Levels.	15–18

Accessories

Nikon Total Station Accessories.	19
Nikon Theodolite and Auto Level Accessories	20

Total Stations

Nivo C Series



- Survey Pro software on-board
- Windows CE touch-screen
- High quality Nikon optics
- 1", 2", 3" and 5" angle accuracies
- Prism and reflectorless measurements
- Easy-to-use 2nd face keypad
- Hot swappable batteries
- Compact, rugged, and lightweight
- Cable-free Bluetooth®
- Optional laser plummet

Nikon's next generation total station is the Nivo™ Total Station, available in two exciting lines: the Nivo C Series and Nivo M Series.

Both of the Nivo series are the absolute leaders for go anywhere measurement tools. Compact in size and lightweight, they are convenient to carry over long distances. All Nivo models are supported with legendary Nikon high clarity optics, allowing clearer images in bright and low light conditions, making measurements easy and reducing eye stress.

The fast, long range EDM measures in both prism and reflectorless modes. Measure precisely to objects up to up to 500 m (1,640 ft) reflectorless measurements.*

Nivo models come standard with a traditional optical plummet which can be upgraded to a laser plummet. All Nivo C Series include a lumi guide for stakeout assistance.

** Objects with high reflectivity (90%).*

The Nivo C Series is designed with a feature-packed Windows® CE touch-screen interface. Field application software functions are supported by the world class Spectra Precision® Survey Pro™ field software for all your surveying and construction measurement needs.

All Nivo C Series solutions are designed with high productivity in mind, including a dual face display for efficient high precision angle and distance measurements. Work all day long with endless power using hot swappable batteries, you'll never need to worry about interrupting your workflow to change a battery again.

To assist you with the multitude of data needs of the 21st century, the Nivo C Series includes:

- Support for USB memory sticks
- Wireless cable-free Bluetooth connections to external data collectors
- A USB High-speed data transfer port
- LumiGuide stakeout assistance

The Nivo C Series is available in 1", 2", 3" and 5" models to meet your specific accuracy needs.

Total Stations

Nivo M Series



- High quality Nikon optics
- Intuitive powerful software
- Fast, accurate EDM
- Prism and reflectorless measurements
- Easy-to-use keypad
- Hot swappable batteries
- Compact, rugged, and lightweight
- Cable-free Bluetooth
- Optional laser plummet

Nikon's next generation total station is Nivo and it is available in two exciting lines: the Nivo C Series and Nivo M Series.

Both of the Nivo series are the absolute leaders for go anywhere measurement tools. Compact in size and lightweight, they are convenient to carry over long distances. All Nivo models are supported with legendary Nikon high clarity optics, allowing clearer images in bright and low light conditions, making measurements easy and reducing eye stress.

The fast, long range EDM measures in both prism and reflectorless modes. Measure precisely to objects up to 500 m (1,640 ft) reflectorless measurements.*

Nivo M Series models support Bluetooth communications to external data collectors. In addition all models come standard with a traditional optical plummet which can be upgraded to a laser plummet. The Nivo^{2M} features dual displays.

* Objects with high reflectivity (90%).

** Low temperature model available.

Nikon has combined simplicity and quality together in perfect harmony to produce the Nikon M Series.

These compact and efficient products use a field-proven Nikon interface and field software that is quick to learn and easy-to-use.

Supporting both prism-based and reflectorless technologies, you can be assured of accurate repeatable measurements all day long to any point.

The distance measurements are fast and flexible with the Nivo M Series. Use the MSR1 & MSR2 keys to separately configure different prism or reflectorless measurement parameters, eliminating time switching between measurement modes.

Nivo M Series field software highlights include:

- A complete set of CoGo functions
- Simple data management of files
- Quick-coding for convenient one-button data collection of point features and your raw target data.

The ultimate in quality for hardworking conditions all day, every day.

The Nivo M Series is available in 2", 3" and 5"*** models to meet your specific accuracy needs.

SPECIFICATIONS	NIVO 1.C / NIVO 2.C		NIVO 3.C / NIVO 5.C	
	NIVO 1.C	NIVO 2.C	NIVO 3.C	NIVO 5.C
ANGLE MEASUREMENT				
Minimum increment	0.5° 0.1 mgon 1°/0.3 mgon	1° 0.1 mgon 2°/0.6 mgon	1° 0.1 mgon 3°/1 mgon	1° 0.1 mgon 5°/1.5 mgon
ISO 17123-3 accuracy (horizontal and vertical)				
TELESCOPE				
Magnification	30× (18×/36× with optional eyepieces)		30× (18×/36× with optional eyepieces)	
Effective diameter of objective	40 mm (1.6 in)		45 mm (1.8 in)	
Minimum focusing distance	1.5 m (4.9 ft)		1.5 m (4.9 ft)	
Reticle illumination	Yes, 3 levels		Yes, 3 levels	
Lumiguide	Yes		Yes	
DISTANCE MEASUREMENT				
Reflectorless mode (KCC 18%)	Good ⁵ 350 m (1,148 ft) 500 m (1,640 ft)	Difficult ⁷ 200 m (656 ft) 250 m (820 ft)	Good ⁵ 250 m (820 ft) 400 m (1,312 ft)	Difficult ⁷ 150 m (492 ft) 250 m (820 ft)
Reflectorless mode (KCC 90%)				
With single prism (Good conditions)				
Accuracy (Prism/Precise mode) 1, 2	3,000 m (9,843 ft) (2+2 ppm × D) mm (3+2 ppm × D) mm		5,000 m (16,404 ft) (2+2 ppm × D) mm (3+2 ppm × D) mm	
Accuracy (Reflectorless/Precise mode) 1, 2				
MEASURING INTERVALS				
Prism mode	1.6 sec		1.5 sec	
Normal mode	0.8 sec		0.8 sec	
Precise mode	2.1 sec		1.8 sec	
Reflectorless mode	1.2 sec		1.0 sec	
Normal mode				
Precise mode	1 mm (0.002 ft) 10 mm (0.02 ft)		1 mm (0.002 ft) 10 mm (0.02 ft)	
Normal mode				
ENVIRONMENTAL SPECIFICATIONS				
OPERATING TEMPERATURE RANGE	-20 °C to +50 °C (-4 °F to +122 °F)		-20 °C to +50 °C (-4 °F to +122 °F)	
ATMOSPHERIC CORRECTION				
Temperature range	-40 °C to +60 °C (-40 °F to +140 °F) 400 mmHg to 999 mmHg 533 hPa to 1,332 hPa		-40 °C to +60 °C (-40 °F to +140 °F) 400 mmHg to 999 mmHg 533 hPa to 1,332 hPa	
Barometric pressure				
	15.8 inHg to 39.3 inHg		15.8 inHg to 39.3 inHg	
TILT SENSOR	Dual axis		Dual axis	
LEVELVALS				
Sensitivity of Circular level vial	10°/2 mm		10°/2 mm	
OPTICAL PLUMMET MAGNIFICATION	3×		3×	
DISPLAY				
Face 1	QVGA, 16 bit color, TFT LCD, backlit (320×240 pixel)		QVGA, 16 bit color, TFT LCD, backlit (320×240 pixel)	
Face 2	Backlit, graphic LCD (128×64 pixel)		Backlit, graphic LCD (128×64 pixel)	
MEMORY	128 MB RAM, 128 MB Flash memory		128 MB RAM, 128 MB Flash memory	
DIMENSIONS (W×D×H)	149 mm x 145 mm x 306 mm (5.8 in x 5.7 in x 12.0 in)		149 mm x 145 mm x 306 mm (5.8 in x 5.7 in x 12.0 in)	
WEIGHT (APPROX.)				
Main unit (without batteries)	3.9 kg (8.6 lb)		3.8 kg (8.4 lb)	
Battery	0.1 kg (0.02 lb)		0.1 kg (0.02 lb)	
Carrying case	2.3 kg (5.1 lb)		2.3 kg (5.1 lb)	
INTERNAL LI-ION BATTERY (V2)				
Operating time ⁴	approx. 12 hours (continuous distance/angle measurement) approx. 26 hours (distance/angle measurement every 30 seconds) approx. 28 hours (continuous angle measurement)		approx. 7.5 hours (continuous distance/angle measurement) approx. 16 hours (distance/angle measurement every 30 seconds) approx. 20 hours (continuous angle measurement)	
Output voltage	3.8 VDC		3.8 V DC	
Recharging time	4 hours		4 hours	
COMMUNICATION PORTS	1 x serial (RS-232C), 2 x USB (host and client) Integrated Bluetooth		1 x serial (RS-232C), 2 x USB (host and client) Integrated Bluetooth	
WIRELESS COMMUNICATIONS				

1. (3+3 ppm × D) mm -20 °C to -10 °C, +40 °C to +50 °C (-4 °F to +14 °F, +104 °F to +122 °F).

2. Standard deviation based on ISO 17123-4.

3. Measuring time may vary depending on measuring distance and conditions. For the initial measurement, it may take a few more seconds.

4. Battery life specification at 25 °C (77 °F). Operation time may be slower in low temperatures and if the battery is not new.

5. Good conditions (good visibility, overcast, twilight, underground, low ambient light).

6. Normal conditions (normal visibility, object in the shadow, moderate ambient light).

7. Difficult conditions (haze, object in direct sunlight, high ambient light).

SPECIFICATIONS	NIVO 2.M	NIVO 3.M	NIVO 5.M
ANGLE MEASUREMENT Minimum increment	Degree: 1/5/10° Gon: 0.2/1/2 mgon ML6400: 0.005/0.02/0.05 mil 2°/0.6 mgon	Degree: 1/5/10° Gon: 0.2/1/2 mgon ML6400: 0.005/0.02/0.05 mil 3°/1 mgon	Degree: 1/5/10° Gon: 0.2/1/2 mgon ML6400: 0.005/0.02/0.05 mil 5°/1.5 mgon
TELESCOPE Magnification Effective diameter of objective Minimum focusing distance Reticle illumination	30× (18×/36× with optional eyepieces) 40 mm (1.6 in) 1.5 m (4.9 ft)	30× (18×/36× with optional eyepieces) 45 mm (1.8 in) 1.5 m (4.9 ft)	30× (18×/36× with optional eyepieces) 45 mm (1.8 in) 1.5 m (4.9 ft)
DISTANCE MEASUREMENT Reflectorless mode (NGC 18%) Reflectorless mode (NGC 90%) With single prism (Good conditions) With single prism (Precise mode) ^{1,2} Accuracy (Reflectorless/Precise mode) ^{1,2}	Good ⁵ 350 m (1,148 ft) 500 m (1,640 ft)	Good ⁵ 250 m (820 ft) 400 m (1,312 ft)	Good ⁵ 250 m (820 ft) 400 m (1,312 ft)
MEASURING INTERVALS Prism mode Precise mode Normal mode Reflectorless mode Normal mode Precise mode Normal mode	Normal ⁶ 250 m (820 ft) 400 m (1,312 ft) 3,000 m (9,843 ft) (2+2 ppm x D) mm (3+2 ppm x D) mm	Normal ⁶ 200 m (656 ft) 300 m (984 ft) 5,000 m (16,404 ft) (2+2 ppm x D) mm (3+2 ppm x D) mm	Normal ⁶ 200 m (656 ft) 300 m (984 ft) 5,000 m (16,404 ft) (2+2 ppm x D) mm (3+2 ppm x D) mm
ENVIRONMENTAL SPECIFICATIONS Operating temperature range Atmospheric correction Temperature range	1.6 sec. 0.8 sec. 2.1 sec. 1.2 sec. 1 mm (0.002 ft) 10 mm (0.02 ft)	1.5 sec. 0.8 sec. 1.8 sec. 1.0 sec. 1 mm (0.002 ft) 10 mm (0.02 ft)	1.5 sec. 0.8 sec. 1.8 sec. 1.0 sec. 1 mm (0.002 ft) 10 mm (0.02 ft)
OPERATING TEMPERATURE RANGE	-20 °C to +50 °C (-4 °F to +122 °F)	-20 °C to +50 °C (-4 °F to +122 °F)	-20 °C to +50 °C (-4 °F to +122 °F)*
ATMOSPHERIC CORRECTION Temperature range	-40 °C to +60 °C (-40 °F to +140 °F)	-40 °C to +60 °C (-40 °F to +140 °F)	-40 °C to +60 °C (-40 °F to +140 °F)
Barometric pressure	400 mmHg to 999 mmHg 533 hPa to 1,332 hPa 15.8 inHg to 39.3 inHg	400 mmHg to 999 mmHg 533 hPa to 1,332 hPa 15.8 inHg to 39.3 inHg	400 mmHg to 999 mmHg 533 hPa to 1,332 hPa 15.8 inHg to 39.3 inHg
TILT SENSOR Level vials Sensitivity of Circular level vial	Dual axis 10°/2 mm 3×	Dual axis 10°/2 mm 3×	Dual axis 10°/2 mm 3×
OPTICAL PLUMMET Magnification	Dual, backlit, graphic LCD (128x64 pixel)	Single side, backlit, graphic LCD (128x64 pixel)	Single side, backlit, graphic LCD (128x64 pixel)
DISPLAY	10,000 records	10,000 records	10,000 records
POINT MEMORY	149 mm x 145 mm x 306 mm (5.8 in x 5.7 in x 12.0 in)	149 mm x 145 mm x 306 mm (5.8 in x 5.7 in x 12.0 in)	149 mm x 145 mm x 306 mm (5.8 in x 5.7 in x 12.0 in)
DIMENSIONS (W X D X H)	3.8 kg (8.4 lb) 0.1 kg (0.2 lb) 2.3 kg (5.1 lb)	3.6 kg (8.0 lb) 0.1 kg (0.2 lb) 2.3 kg (5.1 lb)	3.6 kg (8.0 lb) 0.1 kg (0.2 lb) 2.3 kg (5.1 lb)
WEIGHT (APPROX.) Main unit (without batteries) Battery Carrying case	approx. 19 hours (continuous distance/angle measurement) approx. 57 hours (distance/angle measurement every 30 seconds) approx. 62 hours (continuous angle measurement)	approx. 10 hours (continuous distance/angle measurement) approx. 26 hours (distance/angle measurement every 30 seconds) approx. 31 hours (continuous angle measurement)	approx. 10 hours (continuous distance/angle measurement) approx. 26 hours (distance/angle measurement every 30 seconds) approx. 31 hours (continuous angle measurement)
INTERNAL LI-ION BATTERY (x2) Operating time ⁴	3.8 V DC 4 hours	3.8 V DC 4 hours	3.8 V DC 4 hours
OUTPUT VOLTAGE Recharging time	1 x serial (RS-232C) Integrated Bluetooth	1 x serial (RS-232C) Integrated Bluetooth	1 x serial (RS-232C) Integrated Bluetooth
COMMUNICATION PORTS			
WIRELESS COMMUNICATIONS			

1. (3+3 ppm x D) mm -20 °C to -10 °C, +40 °C to +50 °C (-4 °F to +14 °F, +104 °F to +122 °F).

2. Standard deviation based on ISO 17123-4.

3. Measuring time may vary depending on measuring distance and conditions. For the initial measurement, it may take a few more seconds.

4. Battery life specification at 25 °C (77 °F). Operation time may be shorter in low temperatures and if the battery is not new.

5. Good conditions (good visibility, overcast, twilight, underground, low ambient light).

6. Normal conditions (normal visibility, object in the shadow, moderate ambient light).

7. Difficult conditions (haze, object in direct sunlight, high ambient light).

* Low temperature model available -30 °C (-22 °F).

Total Stations

DTM-322



- Legendary Nikon optics
- Fast, accurate EDM
- 3" and 5" angle accuracies
- Convenient and long-lasting rechargeable AA batteries
- Easy-to-use keypad
- Rugged and lightweight
- Linear focusing mechanism

Nikon introduces the DTM-322 Total Station that delivers an economic, versatile, and easy-to-use platform to make sure you get the job done right.

Nikon's legendary optics effectively allow in more light to give you brighter, clearer images. You'll see the difference when you look through a Nikon Total Station even in the low-visibility conditions typical in the field. You'll see much more detail and much less distortion, especially over longer distances. Better optics help you aim more precisely, and they're much easier on your eyes – something you'll really appreciate on long workdays.

The Nikon DTM-322 Total Station is among the fastest total stations in its class, so you can move quickly through your routines and spend less time in the field. The DTM-322 is rugged and lightweight – at 5kg (11 lb) including the battery.

Using rechargeable AA batteries, the DTM-322 is designed to consume low power and provide the longest possible time in the field. Off-the-shelf AA batteries can also be used as a back-up to provide even longer life.

DTM-322 is available in a 3" dual face model and a 5" single face model to meet your specific accuracy needs.

The Nikon DTM-322 is built tough for all occasions.

SPECIFICATIONS	DTM-322	
DISTANCE MEASUREMENT		
Range with Nikon specified prisms		
Good conditions (No haze, visibility over 40 km (25 miles))		
With reflector sheet (5 × 5 cm)	5 m to 100 m (16.4 ft to 328 ft)	
With single prism 6.25 cm (2.5 in)	2,300 m (7,540 ft)	
Normal conditions (Ordinary haze, visibility approx. 20 km (12.4 miles))		
With reflector sheet (5 × 5 cm)	5 m to 100 m (16.4 ft to 328 ft)	
With single prism 6.25 cm (2.5 in)	2,000 m (6,560 ft)	
Accuracy (Prism/Precise mode) ^{1,2}	±(3+2 ppm × D) mm	
Measuring interval ³	Precise mode	Normal mode
Prism mode	1.6 sec.	1.0 sec.
Least count (Precise mode/Normal mode)	1 mm (0.002 ft)	10 mm (0.02 ft)
ANGLE MEASUREMENT		
ISO 17123-3 accuracy (horizontal and vertical)	3"/1.0 mgon	5"/1.5 mgon
Circle diameter	88 mm (3.46 in)	
Horizontal angle	3"/Diametrical	5"/Single
Vertical angle	3"/Single	5"/Single
Minimum increment	Degree: 1/5/10"; Gon: 0.2/1/2 mgon; MIL6400: 0.005/0.02/0.05 mil	
TELESCOPE		
Magnification	33× (21×/41× with optional eyepieces)	
Minimum focusing distance	1.5 m (4.92 ft)	
TILT SENSOR – TYPE		
Single-axis		
COMMUNICATIONS – PORTS		
1 x serial (RS-232C)		
POWER		
Clip-on rechargeable battery system	4x AA Ni-MH Battery	
Operating time ⁴	approx. 15 hours (continuous distance/angle measurement every 30 s.)	
GENERAL SPECIFICATIONS		
Level vials – Sensitivity of Plate level vial	30"/2 mm	
Sensitivity of Circular level vial	10"/2 mm	
Optical plummet		
Magnification	3×	
Focusing range	0.5 m (1.6 ft) to ∞	
Display	3"/Dual face, graphic LCD (128x64 pixel) 5"/Single face, graphic LCD (128 × 64 pixel)	
Point memory	10,000 records	
Dimensions (L x H x W)	168 mm × 173 mm × 335 mm (6.6 in × 6.8 in × 13.2 in)	
Weight		
Main unit (without battery)	4.8 kg (10.6 lb)	
Battery / Carry case	0.2 kg (0.4 lb) / 2.4 kg (5.3 lb)	
ENVIRONMENTAL		
Ambient temperature range	–20 °C to +50 °C (–4 °F to +122 °F)	
Atmospheric correction		
Temperature range	–40 °C to +55 °C (–40 °F to +131 °F)	
Barometric pressure	400 mmHg to 999 mmHg / 533 hPa to 1,332 hPa / 15.8 inHg to 39.3 inHg	
Dust and water protection	IP55	
CERTIFICATION	Class B Part 15 FCC certification, CE Mark approval, C-Tick.	

1 ±(3+3 ppm × D) mm –20 °C to –10 °C, +40 °C to +50 °C (–4 °F to +14 °F, +104 °F to +122 °F).

2 Standard deviation based on ISO 17123-4

3 Measuring time may vary depending on measuring distance and conditions.

4 Battery life specification at 25 °C (77 °F).

Theodolites



- Four models to choose from: NE-100/101/102/103
- Accurate, affordable, easy-to-use
- Ergonomic keypad
- One-touch function keys
- Large, backlit LCD display
- NE-100/101 models are water-resistant
- NE-102/103 models are waterproof
- 5", 7" and 10" accuracies available

Designed for general construction and survey applications, Nikon NE-100 Series electronic digital theodolites give you accurate measurements in an affordable, easy-to-use platform. Each of the four models has an ergonomic keypad with one-touch keys for all functions, and a large backlit LCD display helps you work productively in the field.

You can instantly convert vertical angles to percent of grade, reset the horizontal angle to zero and lock the horizontal angle displayed on the LCD while you reposition or repeat a measurement. Angle accuracies differ between the models. The NE-100 offers 10" angle accuracy, while the NE-101 offers 7". Both the NE-102 and 103 models offer 5" angle accuracy with the NE-103 featuring vertical axis compensation. NE-102 and NE-103 also have a rear display and keypad.

NE-100 series theodolites feature five easy-to-use, one-touch keys: four to perform all common functions and a fifth to control the backlit LCD display and reticle illumination. NE-100 Series theodolites feature a built-in reticle illuminator and backlit LCD

display that allow you to work inside buildings as well as in tunnels, mines and other environments with little or no light. These features also come in handy during low light conditions outdoors, such as near dawn or dusk.

Unlike other instruments that require specialized batteries, NE-100 Series theodolites use six standard AA batteries. What's more, those batteries can power all models for about 48 hours. A three-level bar graph on the LCD screen displays remaining battery power.

With the Nikon NE-100 Series theodolite models, you can count on reliable performance in tough conditions. The NE-100/101 models have an IP54 rating, meaning water can splash on them from any direction with no harmful effects. Nikon NE-102/103 models have a higher rating of IP56 which means they're waterproof and dustproof.

SPECIFICATIONS	NE-100	NE-101	NE-102	NE-103
ANGLE MEASUREMENT				
Reading system	photoelectric incremental encoder	photoelectric incremental encoder	photoelectric incremental encoder	photoelectric incremental encoder
Circle diameter	79 mm (3.1 in)	79 mm (3.1 in)	79 mm (3.1 in)	79 mm (3.1 in)
Unit of reading	degree/gon/mil	degree/gon/mil	degree/gon/mil	degree/gon/mil
Minimum digital reading	10/20"/2.5 mgon, 0.05/0.1 mil	5/10"/1.2 mgon, 0.02/0.05 mil	5/10"/1.2 mgon, 0.02/0.05 mil	5/10"/1.2 mgon, 0.02/0.05 mil
Accuracy (DIN 18723)	10"/3 mgon	7"/2 mgon	5"/1 mgon	5"/1 mgon
TELESCOPE				
Effective diameter of objective	45 mm (1.8 in)	45 mm (1.8 in)	45 mm (1.8 in)	45 mm (1.8 in)
Magnification	30x	30x	30x	30x
Image	erect	erect	erect	erect
Field of view	1°20' (2.3 m @ 100 m/2.3 ft @ 100 ft)	1°20' (2.3 m @ 100 m/2.3 ft @ 100 ft)	1°20' (2.3 m @ 100 m/2.3 ft @ 100 ft)	1°20' (2.3 m @ 100 m/2.3 ft @ 100 ft)
Minimum focusing distance	0.7 m (2.3 ft)	0.7 m (2.3 ft)	0.7 m (2.3 ft)	0.7 m (2.3 ft)
Stadia multiplier constant	100	100	100	100
Stadia additive constant	0	0	0	0
Reticle illuminator	Yes	Yes	Yes	Yes
AUTOMATIC VERTICAL COMPENSATOR				
Type	—	—	—	liquid-electric detection
Working range	—	—	—	±3' (out-of-range warning provided)
DISPLAY/KEYPAD				
Front				
Type	dot-matrix LCD (20 characters x 2 lines)	dot-matrix LCD (20 characters x 2 lines)	dot-matrix LCD (20 characters x 2 lines)	dot-matrix LCD (20 characters x 2 lines)
Backlight	1-level illumination	1-level illumination	1-level illumination	1-level illumination
Keypad	5 buttons	5 buttons	5 buttons	5 buttons
Rear				
Type	—	—	—	—
Backlight	—	—	—	—
Keypad	—	—	—	—
OPTICAL PLUMMET				
Magnification	2.2x	2.2x	3x	3x
Field of view	5°	5°	5°	5°
Focusing range	1.3 m (4.3 ft) fixed	1.3 m (4.3 ft) fixed	0.5 m (1.6 ft) to infinity	0.5 m (1.6 ft) to infinity
LEVEL SENSITIVITY				
Plate level	60"/2 mm	40"/2 mm	30"/2 mm	30"/2 mm
Circular level	10"/2 mm	10"/2 mm	10"/2 mm	10"/2 mm
LEVELING BASE Type	detachable	detachable	detachable	detachable
AMBIENT TEMPERATURE RANGE	-20 to 50°C (-4 to 122°F)	-20 to 50°C (-4 to 122°F)	-20 to 50°C (-4 to 122°F)	-20 to 50°C (-4 to 122°F)
ENVIRONMENTAL RATING	IP54	IP54	IP56	IP56
DIMENSIONS Instrument	153.5 x 172 x 334 mm (6.0 x 6.8 x 13.1 in)	153.5 x 172 x 334 mm (6.0 x 6.8 x 13.1 in)	153.5 x 172 x 334 mm (6.0 x 6.8 x 13.1 in)	153.5 x 172 x 334 mm (6.0 x 6.8 x 13.1 in)
WEIGHT Instrument	4.5 kg (9.8 lb)	4.5 kg (9.8 lb)	4.5 kg (9.8 lb)	4.6 kg (10.1 lb)
Carrying case	2.5 kg (5.4 lb)	2.5 kg (5.4 lb)	3.9 kg (8.6 lb)	3.9 kg (8.6 lb)
POWER SUPPLY Battery type	1.5V AAA x 6	1.5V AAA x 6	1.5V AAA x 6	1.5V AAA x 6
Continuous operating time (at 68°F/20°C)	48 hours	48 hours	48 hours	48 hours



- Three models to choose from: AP-8/AC-2S/AX-2S
- Compact and lightweight
- Water-resistant construction
- Magnetic-dampened automatic compensator
- Horizontal tangent knobs with unlimited range
- Smooth, precise pointing and angular measurement
- Detachable eyepiece lens

AP/AC/AX Series auto levels are easy to set up and use. All three models can attach to both flat- and spherical-head tripods. Horizontal tangent knobs with an unlimited range ensure smooth, precise pointing and angular measurement, and you can operate them with either hand. The detachable eyepiece lens lets you use an optional diagonal eyepiece prism for working in extremely close or steep quarters.

Nikon optics effectively let in more light, so you see brighter, sharper images-especially in low-light conditions. The AP-8 model auto level features a 28x high-magnification telescope, the AC-2S has a 24x telescope, and the AX-2S has a 20x telescope. All three models offer minimum focusing down to 2.46 ft (0.75 m) for better performance in tight spots or on steep slopes.

SPECIFICATIONS	AP-8	AC-2S	AX-2S
TELESCOPE			
Tube length	190 mm (7.5 in)	190 mm (7.5 in)	190 mm (7.5 in)
Image	erect	erect	erect
Magnification	28x	24x	20x
Effective diameter of objective lens	30 mm (1.2 in)	30 mm (1.2 in)	30 mm (1.2 in)
Field of view	1°30' (2.6 ft @ 100 ft)	1°30' (2.6 ft @ 100 ft)	1°30' (2.6 ft @ 100 ft)
Minimum focusing distance	.75 m (2.46 ft)	.75 m (2.46 ft)	.75 m (2.46 ft)
Stadia ratio	1:100	1:100	1:100
Stadia additive constant:	0	0	0
LEVEL VIAL SENSITIVITY			
Circular level	10'/2 mm	10'/2 mm	10'/2 mm
STANDARD DEVIATION (1 km double-run leveling)			
Without micrometer	±1.5 mm	±2.0 mm	±2.5 mm
AUTOMATIC COMPENSATOR			
Type	wire-hung, magnetic damper	wire-hung, magnetic damper	wire-hung, magnetic damper
Compensation range	±16'	±16'	±16'
Setting accuracy	±0.5"	±0.5"	±0.5"
HORIZONTAL CIRCLE			
Diameter of circle	110 mm (4.3 in)	110 mm (4.3 in)	110 mm (4.3 in)
Minimum increment	1°/1 g	1°/1 g	1°/1 g
Reading estimation	0.1°/0.1g	0.1°/0.1g	0.1°/0.1g
DIMENSIONS			
Instrument (L x H x W)	190 x 128 x 123 mm (7.5 x 5.0 x 4.8 in)	190 x 128 x 123 mm (7.5 x 5.0 x 4.8 in)	190 x 128 x 123 mm (7.5 x 5.0 x 4.8 in)
Carrying case	292 x 170 x 163 mm (11.5 x 6.7 x 6.4 in)	292 x 170 x 163 mm (11.5 x 6.7 x 6.4 in)	292 x 170 x 163 mm (11.5 x 6.7 x 6.4 in)
WEIGHT			
Instrument	1.25 kg (2.8 lb)	1.25 kg (2.8 lb)	1.25 kg (2.8 lb)
Carrying case	1.2 kg (2.7 lb)	1.2 kg (2.7 lb)	1.2 kg (2.7 lb)

Auto Levels

AS/AE Series



- Four models to choose from: AS-2/2C, AE7/7C
- Compact and lightweight
- Waterproof construction
- Automatic air-dampened compensator
- Standard optical sight lens
- Powerful telescopes with improved minimum focusing
- Carrying case, adjusting pins and lens cap included

Nikon AS/AE Series auto levels feature waterproof, nitrogen-filled, high-power telescopes that help you make precise measurements even in the wettest conditions. They feature a unique automatic air-dampened compensator to prevent magnetic interference, and an endless horizontal fine drive to ensure smooth, precise pointing and angular measurement. AS/AE Series auto levels are easy to set up and easy-to-use. All four models can attach to both flat- and spherical-head tripods, and the standard optical sight lens helps you find your target quickly, easily and accurately. A mirror with a pentaprism lets you view the circular bubble as an erect image during setup and sighting.

SPECIFICATIONS	AS-2/2C	AE-7/7C
TELESCOPE		
Tube length	259 mm (10.2 in)	220 mm (8.7 in)
Image	erect	erect
Magnification	34x	30x
Effective diameter of objective lens	45 mm (1.8 in)	40 mm (1.6 in)
Field of view	1°20' (2.3 ft @ 100 ft)	1°30' (2.6 ft @ 100 ft)
Minimum focusing distance	1.0 m (3.28 ft)	0.3 m (0.98 ft)
Stadia ratio	1:100	1:100
Stadia additive constant:	0	0
Resolution power	2.5"	3"
LEVEL VIAL SENSITIVITY		
Circular level	10'/2 mm	10'/2 mm
STANDARD DEVIATION (1 km double-run leveling)		
Without micrometer	±0.8 mm	±1.0 mm
With micrometer	±0.4 mm	±0.45 mm
AUTOMATIC COMPENSATOR		
Type	wire-hung, air damper	wire-hung, air damper
Compensation range	±12'	±16'
Setting accuracy	±0.3"	±0.35"
HORIZONTAL CIRCLE		
Diameter of circle	80 mm (3.2 in) (AS-2C only)	118 mm (4.6 in) (AE-7C only)
Minimum increment	1°/1 g	1°/1 g
Reading estimation:	1'/1 cg	0.1°/0.1 g
DIMENSIONS		
Instrument (L x H x W)	259 x 136 x 142 mm (10.2 x 5.4 x 5.6 in)	220 x 136 x 142 mm (8.7 x 5.4 x 5.6 in)
Carrying case	379 x 195 x 197 mm (14.9 x 7.7 x 7.8 in)	379 x 195 x 197 mm (14.9 x 7.7 x 7.8 in)
WEIGHT		
Instrument	1.8 kg (4.0 lb)/1.9 kg (4.2 lb)	1.7 kg (3.7 lb)
Carrying case	1.8 kg (4.0 lb)/1.9 kg (4.2 lb)	1.8 kg (4.0 lb)/1.9 kg (4.2 lb)



TOTAL STATION ACCESSORIES

DATA TRANSFER CABLES

RS232C: Cable TS to PC (9 pin)
Connects Nikon Total Station serial port to PC serial port

RS232C: Cable TS to PC(USB)
Connects Nikon Total Station serial port to USB port

Mini USB Cable
Connects Nikon Total Station USB port to PC USB port

POWER SUPPLIES

Nivo C & M Series
On-board Li Ion battery
Dual battery charger
AC adapter for battery charger

DTM-322
(4) NiMH AA batteries
4 x AA battery charger
Input cord and adapter

PRISMS AND EYEPIECES

Diagonal Eyepiece Prism (Erect Image)
For telescope (black body)
Solar Filter (52 mm) Objective
Low-Power Eyepiece Lens
Mag. 18x with Nivo C & M Series
Mag. 21x with DTM-322
High-Power Eyepiece Lens
Mag. 36x with Nivo C & M Series
Mag. 41x with DTM-322

Lens Cap (Plastic snap-on)

INSTRUMENT CASES

Plastic case for Nivo C & M Series
Plastic case for DTM-322

TRIPODS, RANGE POLES, AND TRIBRACHS

TRIPODS

Wooden, Heavy Duty, Round Head Tripod
Aluminum, Heavy Duty, Quick Clamp Tripod
Advanced Fiberglass Composite, Heavy Duty
Tri-Max Tripod

RANGE POLES

2 m Aluminum Range Pole
2 m Carbon Fiber Range Pole
2 m Carbon Fiber Snap-Lock Range Pole
2.6 m Telescopic Range Pole

TRIBRACHS

Tribrach Type W30
White, no optical plummet, circular level
Tribrach Type W30b
Black, no optical plummet, circular level
Tribrach Type W31
White, optical plummet, circular level
Tribrach Type W31b
Black, optical plummet, circular level

ELECTRONIC THEODOLITE ACCESSORIES

PRISMS AND EYEPIECES

Diagonal Eyepiece Prism (Erect Image)
Used for steep sighting, plumbing and when using the instrument in confined areas
For Main Telescope of Theodolite NE-100 Series

Low-Power Eyepiece Lens
18X when attached to NE-100 Series

High-Power Eyepiece Lens
36x when attached to NE-100 Series
Theodolite

Tubular Compass Adapter for NE-100 Series
To mount HEC21001 Tubular Compass onto NE-100 Series
Carrying Handle

INSTRUMENT CASES

Plastic Instrument Case for
NE-100/101/102/103

AUTOMATIC LEVEL ACCESSORIES

PRISMS AND EYEPIECES

Optical Micrometer in Meters for AS/AE Series
Plane Parallel Micrometer for AS-2/AS/AE-7 Series with leatherette case
Diagonal Eyepiece Prism (Erect Image)
Low-Power Eyepiece Lens
22x when attached to AS-2/AS-2C
19x when attached to AE-7/AE-7C
17x when attached to AC-2S

High-Power Eyepiece Lens
43x when attached to AS-2/AS-2C
37x when attached to AE-7/AE-7C
35x when attached to AC-2S

NIKON

10355 Westmoor Drive
Suite #100
Westminster, CO 80021
USA

sales@nikonpositioning.com
www.nikonpositioning.com

For more information and sales contacts:
www.nikonpositioning.com



Specifications subject to changes without notice.

TRIMBLE IS DISTRIBUTING NIKON AUTO -LEVELS, THEODOLITES AND TOTAL STATIONS FOR SURVEYING AND CONSTRUCTION APPLICATIONS AS PART OF A JOINT VENTURE AGREEMENT WITH NIKON CORPORATION .

Contact your local dealer: